

NEW SYSTEM



| B I O T R I T U R A T O R I |



www.caravaggi.com - info@caravaggi.com



Il biotrituratore Bio 350 è una macchina professionale per la riduzione volumetrica del materiale legnoso con un diametro di 160 mm derivante dalla manutenzione di aree verdi. Disponibile nella versione standard con rotore a 40 martelli mobili reversibili in acciaio temperato, adatto a sminuzzare materiale legnoso anche se accidentalmente venissero introdotti piccoli sassi e chiodi. Dispone di ventola per facilitare l'espulsione del materiale e una griglia di raffinazione fissa intercambiabile.

Il rullo idraulico regolabile in velocità e senso di rotazione, dotato di lame per facilitare l'introduzione di ramaglie. Il tubo di scarico è girevole con profondità di gittata regolabile. Il sistema di controllo nostress permette il regolamento automatico delle funzioni impedendo l'intasamento.

Il Bio 350 è disponibile nelle versioni:


Motorizzate diesel, benzina oppure elettrica, con carrello agricolo di serie; nella versione a trattore con carrello a traino agricolo lento.

Tutte le versioni sono realizzate in conformità con le normative europee sulla sicurezza.



The Bio 350 bio-shredder is a machine for professional use. It is designed to crush wood logs of a diameter of 160 mm resulting from the maintenance of green areas. Available in the standard version equipped with a rotor consisting of 40 reversible mobile hammers made of hardened steel, it is suitable for crushing woody material even when small stones or nails accidentally are fed into it. It comes with a fan to facilitate the ejection of the shredded material and a fixed interchangeable refining screen. The hydraulic roller is adjustable in speed and direction of rotation. It comes with blades that facilitate the feeding of branches. The depth of the outlet swivelling pipe can be adjusted.

The no-stress control system provides automatic regulation of operations and prevents any clogging. The Bio 350 is available in the following versions: With a diesel or petrol engine or electrically powered, with a standard agricultural trolley; in the tractor version with a slow agricultural trolley. All versions are manufactured in compliance with European safety regulations.

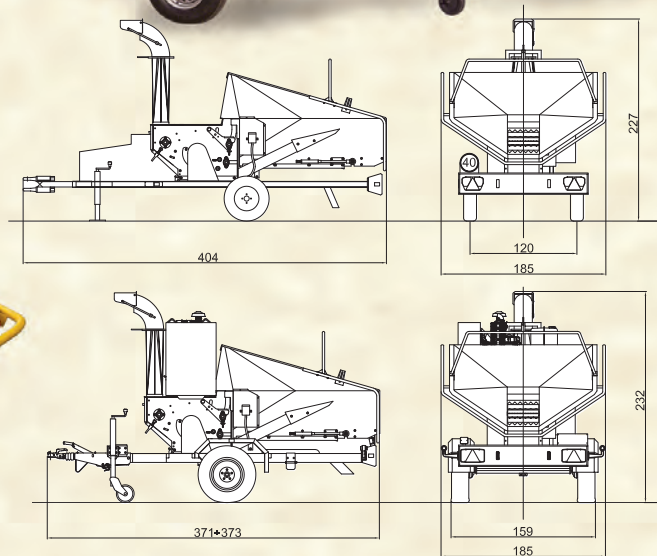

I prodotti sono soggetti ad evoluzione tecnica ed i prospetti potrebbero non essere aggiornati.
As it is company policy to aim continual improvement, the Manufacturer reserves the right to modify any part of the design or specifications without prior notice and without the obligation to make such modifications retrospectively.

POTENZA IN CV				ROTORE A MARTELLI	ROTORE MISTO	Ø TRITURABILE CM.*	PRODUZIONE m³/h*	PESO MEDIO MACCHINA KG.	DIMENSIONI CM.		
ELETTRICO	BENZ.	DIESEL	TRAT.						LARGHEZZA	LUNGHEZZA	ALTEZZA
30/22	25/18	25/18	50÷80	40	24+6	14÷16	12÷14 *	950÷1350	185	404	232
ELECTRIC	PETROL	DIESEL	P.T.O.	HAMMERS ROTOR	MIXED ROTOR	Ø TRITURABILE CM.*	OUTPUT m³/h*	WEIGHT OF BASE MACHINE KG.	WIDTH	LENGHT	HEIGHT
POWER IN HP				DIMENSIONS CM.							

* Il dato citato è legato alla natura del prodotto da triturare e alla velocità di alimentazione

* The mentioned datum depends from the nature of the product to be tritured and from supplied power